

CV-1201D



DVI-D KVM Benefits


- ▶ 12-port DVI-D, USB & Audio KVM
- ▶ DVI-D single link support 1920 x 1200 transmission
- ▶ Support widescreen & native SUN 1152 x 900 resolution
- ▶ Multi-platform for PCs, SUN and Mac G3 / G4 Mac / iMac
- ▶ Hot pluggable, no software or drivers required

Switch Features & Options

- Support VESA DDC2B emulation & TMDS signal pass-through
- Port switching via push button & keyboard hotkeys



12V, 24V and 48V DC Power options

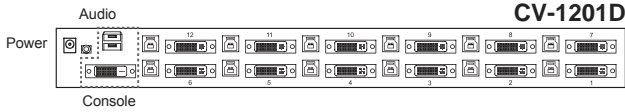


Ordering Information


Console	Local	Remote	IP	12-port
	1	0	0	CV-1201D

KVM Specification

<p>■ KVM Port</p> <p>Number of ports: 12</p> <p>Connector: DVI-D connector USB 3.0 connector (combined for keyboard, mouse & audio)</p> <p>Connectivity: Combo 4-in-1 KVM cable, 6 or 15 feet</p>	<p>■ Power</p> <p>Input: 100 or 240V AC at 50 or 60 Hz via IEC type cord</p> <p>Option DC: 12V / 24V / 48V DC input</p> <p>Consumption: Max. 12 Watt, Standby 5 Watt</p>
<p>■ Local Console</p> <p>Graphic Connector: 1 x DVI-D</p> <p>Resolution: Up to 1920 x 1200</p> <p>Input device: 2 x USB type A for keyboard & mouse</p> <p>Audio out: 1 x 3.5mm stereo audio</p>	<p>■ Regulatory Approval: FCC, CE</p>
<p>■ Management</p> <p>PC Selection: Front button & hotkey</p>	<p>■ Environmental</p> <p>Operating: 0 to 50°C</p> <p>Storage: -5 to 60°C</p> <p>Relative humidity: 90%, non-condensing</p> <p>Shock: 50G peak acceleration (11ms, half-sine wave)</p> <p>Vibration: 58~100Hz / 0.98G (11ms / cycle)</p>
<p>■ Compatibility</p> <p>Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac</p> <p>Support: Windows 7 / Vista / 2003 / XP, Linux, Unix</p>	<p>■ Product Information</p> <p>Dimension (W x D x H): 443 x 180 x 43.6 mm / 17.4 x 7.1 x 1.72 inch</p> <p>Net weight: 3 kg / 6.5 lb</p>
	<p>■ Packing Information</p> <p>Dimension (W x D x H): 500 x 400 x 90 mm / 19.7 x 15.7 x 3.5 inch</p> <p>Gross weight: 5 kg / 11 lb</p>

KVM port connection

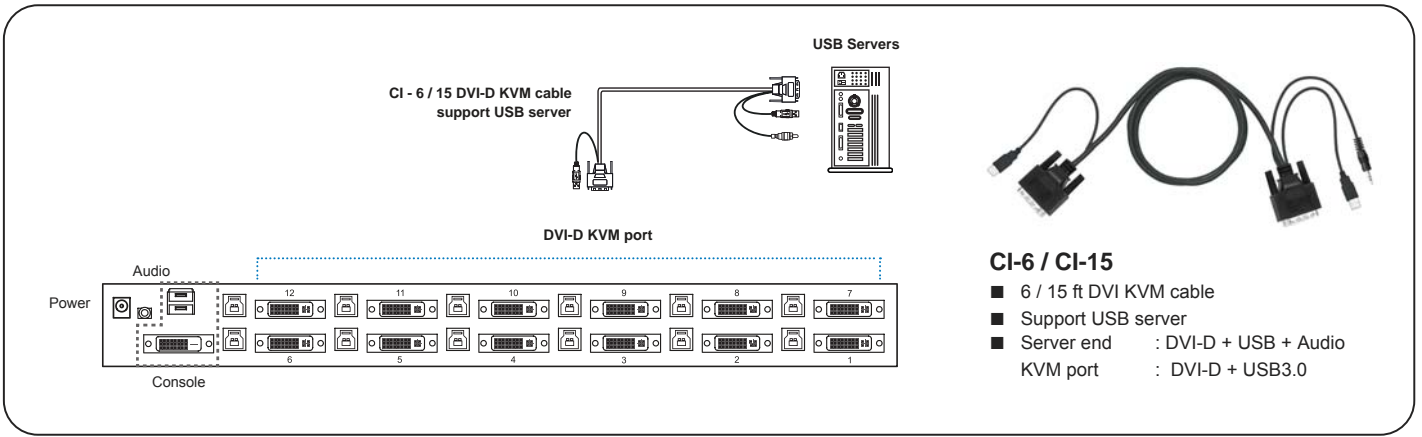

 For detailed product specifications and options, please download the user manual from the link below : www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM.pdf

Front Panel - Port LED Indications

12 ports

